


Instruction Manual

NE-2

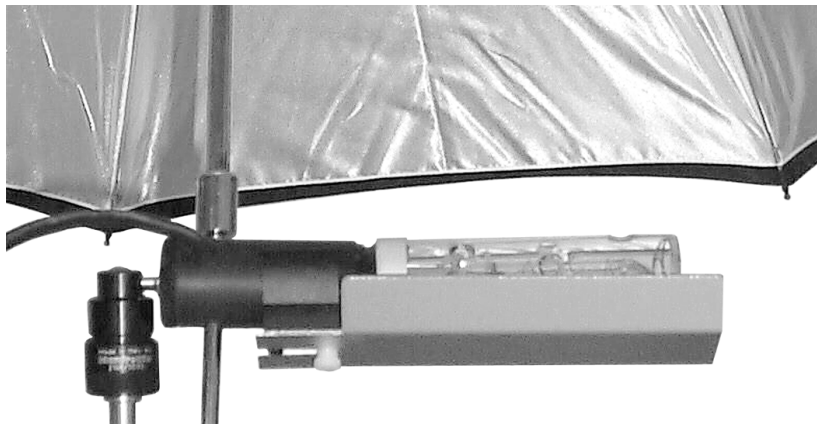

1050 Commerce Ave. • Union, NJ 07083
800-722-6638 / Fax 908-686-6682
flash@dynalite.com www.dynalite.com

Important Safeguards

1. Read and understand all Instructions
2. **Do Not** attempt to remove the flash tube without first allowing it to cool, as heat can build up from firing in rapid succession.
3. **Do Not** remove the flash tube without first unplugging flash head from the power pack.
4. **Do Not** use locking rings to connect cable to the power pack. Locking rings are used to connect flash head pig tail to head extension cables.
5. Never yank the cable of the power pack. Grasp the connector and pull straight out to disconnect.
6. Avoid spills and exposure to moisture. Never use directly on wet floors, near swimming pools or other sources of water.
7. **Do Not** let cables hang on or touch hot accessories or surfaces.
8. **Do Not** operate the equipment with a damaged cord or if the equipment has been dropped or damaged. Your equipment should be checked by an authorized service station before using again.
9. Take care in arranging the flash head cable(s) so that they will not be tripped over or pulled out.
10. Let the flash head(s) cool completely before pulling them away. Loop head cable(s) in an 8" to 10" diameter coil when storing.
11. To avoid electrical shock hazard, **do not** disassemble equipment. Take it to a qualified service station when service or repair is required. Incorrect reassembly could cause an electrical shock hazard when equipment is subsequently used.

Please save these instructions so that all users may read this information.

Flash Head Setup

1. Unpack and check your new Dynalite NE-2 Flash Head.
2. Attach a Bogen Mini Ball (#3309), a Lowell Tilter (T1-36), or any ball stand adapter to the base of the NE-2. The Bogen threaded-topped light stands and the Lowell Tilter mounts the NE-2 to any 5/8th or smaller light stand.
3. Affix flash head to an adequate light stand or support.
4. Attach 0406 head extension cable (accessory) to the four-foot flash pigtail before plugging cable into power pack.
5. Attach umbrella, accessory reflector, or gel holder as needed.
6. Be sure to protect flash tube from damage when attaching accessories. Do not over tighten Plastic thumb screw.

Flash Head Replacement

1. Unplug NE-2 from power pack. Allow to cool.
2. Hold flash head base secure and pull flash tube straight out of the socket. Be careful not to bend pins.
3. To install, align pins and push flash tube straight into socket until seated.

NE-2 Accessories

Clip-on Reversible reflector
0418 16' head extension cable
Suggested bases: Lowell Tilter or Bogen Mini Ball

NE-2 Specifications

Watt Second rating:	1000W/s
Color Temperature:	5400° Kelvin
Weight:	0.7Lbs.
Dimensions:	7 3/8" X 1 5/16" Dia.
Angle of coverage:	360° alone & 100° with reflector