

Many of the Dyna-Lite lighting accessories shown here are interchangeable with other Dyna-Lite flash heads and monolights.

		1015	4040	Uni250R
		2040	4080	Uni400JR
33-01	10" Parabolic Reflector	●		
33-02	9" Parabolic Reflector	●		
33-04	Angle Reducing Ring	●		
33-06A	Accessory Frame	●		
33-06B	Barn Door Set	●		
33-08	Grid Spot Holder	●		
33-08B	7" Grid Set	●	●	●
40-GR7	7" Reflector		●	
UNI-GR7	7" Reflector			●
40-06B7	7" Barn Door & Filter Frame		●	●
40-GR9	9" Reflector		●	
UNI-GR9	9" Reflector			●
40-08B	9" Grid Set		●	●
40-06B9	9" Barn Door & Filter Frame		●	●
40-SW	18" Reflector		●	●
40-SILK	Silk Diffuser for 18" Reflector		●	●
40-SP40	Long Throw Reflector		●	
40-SN7	Snoot	●	●	●
40-OPSPOT	Optical Snoot		●	
LB-2432	ProV 24" x 32" Lightbank	●	●	●
LB-3648	ProV 36" x 48" Lightbank	●	●	●

All Dyna-Lite speedrings, umbrellas, and light stands work with all Dyna-Lite flash heads.

Dyna-Lite, Inc.
 311-319 Long Avenue
 Hillside, NJ 07205
 Corporate: 908.687.8800 • Fax: 908.686.6682
 Sales: 800.722.6638 • Repair: 908.688.3210
 E-mail: flash@dynalite.com • Website: www.dynalite.com

Dyna-Lite®


Instruction Manual

For Models:

33-08 Grid Holder

33-08B Grid Spot Set

33-04 Angle Reducing Ring

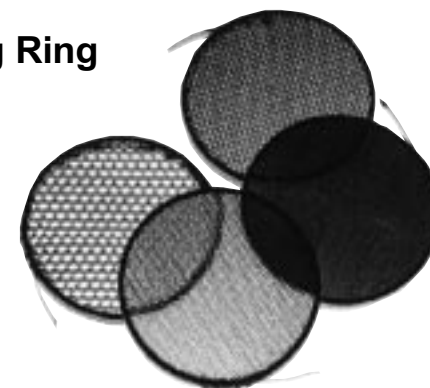


Important Safeguards

Please take a moment to read these safety precautions and instructions. Spending a few moments now will ensure years of use in the future.

- 1 Read and understand **all** instructions.
- 2 Care must be taken as burns could occur from touching the modeling lamp(s) or flash tube(s).
- 3 **Do not** install or remove any accessory until the flash head is disconnected from power pack.
- 4 Allow flash heads and accessories to cool completely before storing or removing accessories or flash head.
- 5 **Do not** let cords or cables hang on or touch hot accessories or surfaces.

Please save these instructions so that all users may read this information.

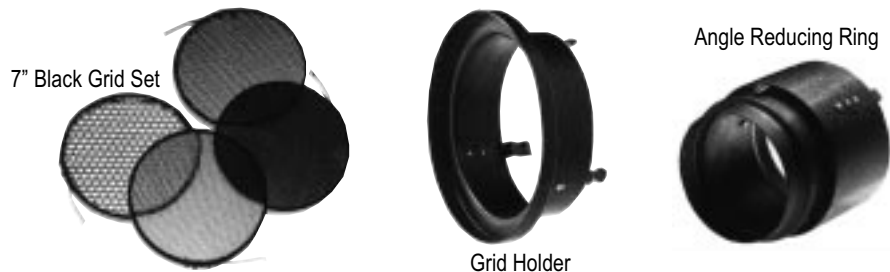

Angle Reducing Ring

The angle reducing ring allows you to reduce the angle of coverage from 140° to 60° for the 1015, 2040 series flash heads. The quality of light will be similar to the flash heads' built-in reflector and will retain the "hard edge" look.* To install, simply follow the instructions for the grid holder on the next page.

*The angle reducing ring can also be used in conjunction with the grid holder and grid set for more dramatic reductions and lighting effects.

Grid Holder & Grid Set Instructions

Your new Grid Set will add another dimension of light control to your Dyna-Lite system. The Grid Set consists of four grids per set: one set 10°, 20°, 30°, 40°, in black. The grids will provide a basic spot light effect and will have a sharp fall-off light pattern.

The Grid Holder is the interface between the grids and your Dyna-Lite 1015 and 2040 flash head. The 40-GR7 on your 4040 and 4080 flash heads also doubles as a 7" grid holder as well. Gels can also be used in the 33-08 grid holder and the 40-GR7 reflector. Additionally, Comet grids, or any other 7" grid can be used in the Dyna-Lite Grid Holder.

Instructions:

Dyna-Lite Grids are simple to use and require no special instruction. They snap into the Dyna-Lite 33-08 grid holder or 40-GR7 reflector. To use the Dyna-lite Grids follow this procedure:

- 1 Disconnect the flash head from the power pack.
- 2 Install the Dyna-Lite Grid Holder (33-08) on flash head. NOTE: Make sure the three (3) spring clips on the grid holder are on the accessory ring.
- 3 Select the grid of your choice and gently press the grid (33-08B) into the grid holder.
- 4 To change or remove the grid, pull the attached Teflon tab.

Packing and Storing:

Do not pack this or any accessory that is still hot to the touch. Hot accessories should be allowed to cool prior to packing or storing.

Use As Gel Holder:

To use various color gels, you must cut the gel material to fit into the grid adapter or reflector. Trace the grid adapter on high temp gel material such as Roscolux Gel Material or equivalent. Cut out the round gel and insert it between the grid and the grid holder.